

Application

The FBO assembly is specifically designed to meet the filtration requirements of today's high pressure common rail diesel injection systems. The unit is used for fuel dispensing pumps or as a primary fuel filter/water separator on large diesel engine applications.

Racor's new FBO-10 and FBO-14 filter assemblies were designed to meet the toughest conditions and offer ease of filter changeouts. The FBO assembly can flow from 10 GPM (38 LPM) to 75 GPM (284 LPM), depending on which model, the element, and the type of fuel to be filtered.

The assembly features a "locking ring collar", which attaches the filter housing to the aluminum die cast filter head with four bolts. The slotted "locking ring collar" allows maintenance personnel to hand loosen the four collar bolts, rotate, and lower the bowl assembly for element changeouts. With a new element installed, simply raise the bowl and rotate into position on the locking ring and hand tighten evenly (evenly torquing the 4 closure bolts to 100 lb-in is highly recommended).

The closure hardware consists of stainless steel nuts, bolts, and washers with metal hand knobs for ease of maintenance. No wrenches or other special tools are required, allowing one person to easily change the filter element (no V-band clamps are used).



FBO-10 and FBO-14 Fuel Filter/Water Separator

How They Work

These versatile fuel filter/water separator assemblies have three element options to meet various requirements. For fuel dispensing applications the filter water separator element is recommended.

The filter water separator element removes contaminants and water from biodiesel, biodiesel blends, diesel fuel, gasoline, and other hydrocarbon fuels. The filter separator allows water to be removed from the fuel stream.

Microfilters are recommended to be used on engines to protect the OEM supplied fuel system. Silicon treated cellulose microfilters remove particle contaminants down to one micron. Microfilters can also be used before filter water separators to extend life.

Absorptive filters absorb water and filter contaminants from diesel fuel and other hydrocarbon streams. The filter separator element is recommended so water can be removed from the fuel stream.

Features

- Die-cast aluminum head
- Steel filter bowl assembly
- Powder coated components
- "Locking ring collar" - no V-clamps
- 1.5" NPT inlet and outlet
- Designed to withstand 150 PSI maximum pressure at 240°F
- Manual drain valve
- Manual vent valve
- Sight Glass



Specifications	Maximum Flow Rates			Clean	Change
	FBO-10	Diesel	Gasoline	Kerosene	Delta P
Microfilter	18 GPM (38 LPM)	52.5 GPM (199 LPM)	35 GPM (132 LPM)	< 2 PSID	15 PSID
Filter Separator	10 GPM (38 LPM)	31.5 GPM (119 LPM)	21 GPM (79 LPM)	< 2 PSID	15 PSID
FBO-14	Diesel	Gasoline	Kerosene	Delta P	Delta P
Microfilter	25 GPM (95 LPM)	75 GPM (284 LPM)	50 GPM (189 LPM)	< 2 PSID	15 PSID
Filter Separator	15 GPM (57 LPM)	45 GPM (170 LPM)	30 GPM (114 LPM)	< 2 PSID	15 PSID

How To Order

Assembly	Element	Delta P Gauge	Sight Glass	Drain Valve
FBO-10	Order Separately			
FBO-10-DP	Order Separately	x		
FBO-10-DPL	Order Separately	x	x	x
FBO-10-25M	FBO-60332	x	x	x
FBO-14	Order Separately			
FBO-14-DP	Order Separately	x		
FBO-14-DPL	Order Separately	x	x	x
FBO-14-25M	FBO-60341	x	x	x

Element Chart	Micron Rating	FBO-10 (6 X 10 Element)	FBO-14 (6 X 14 Element)
Filter Separator	1	FBO-60327	FBO-60336
	5	FBO-60328	FBO-60337
	10	FBO-60353	FBO-60356
	25	FBO-60329*	FBO-60338*
Microfilter	1	FBO-60330	FBO-60339
	5	FBO-60331	FBO-60340
	10	FBO-60354	FBO-60357
	25	FBO-60332	FBO-60341
Absorptive Filter	1	FBO-60333	FBO-60342
	5	FBO-60334	FBO-60343
	10	FBO-60355	FBO-60358
	25	FBO-60335	FBO-60344

* Element is factory installed in the assembly.

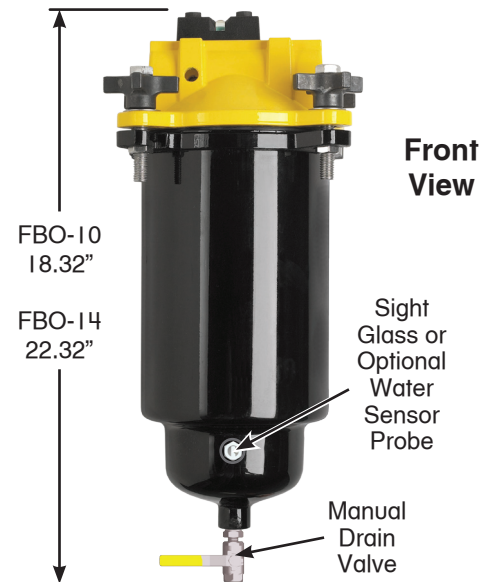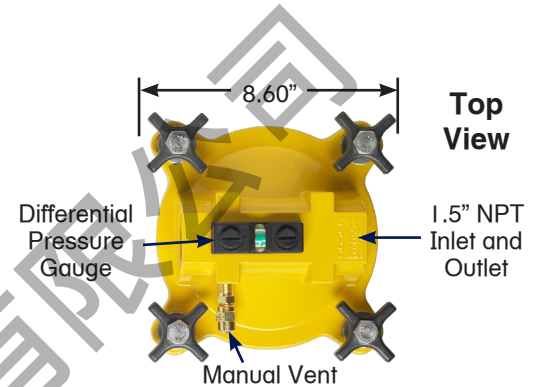

RACOR

Parker Hannifin Corporation
 Racor Division
 P.O. Box 3208
 Modesto, CA 95354 USA
 Tel: 800-344-3286
 Fax: 209-529-3278
<http://www.parker.com/racor>
 e-mail: racor@parker.com



Bulletin #7589
 April 2007
 © All rights reserved.